

# TEST CERTIFICATE

for the slip resistance of floor coverings  
according to DIN EN 16165, Annex B

Tested material: **Wood/wood composite**

Kind of material (wood): Prefinished parquet (oak) with factory treatment  
Article description: Premium Hardwax-Oil  
Dimensions: Oak planks: Variable length, width 202 mm  
(top width 185 mm); test sample 1000 x 500 x 14.5 [mm].  
Color: planks: oak - brown; finish: satin colorless  
- other gloss levels available upon request  
Surface: according to specification: factory-oiled (consumption  
according to technical data sheet: approx. 70 g/m<sup>2</sup>; 2 coats  
necessary) even, fine-rough textured (wood grain structure)  
Producer/Supplier: SAICOS COLOUR GmbH  
Carl-Zeiss-Straße 3  
48336 Sassenberg

Client: SAICOS COLOUR GmbH  
Carl-Zeiss-Straße 3  
48336 Sassenberg

Certificate No.: 96192201.001e

Test date: 18.01.2022

Sampling: Sent by the customer to the research institute

Test method: **DIN EN 16165** (edition 12/2021)  
"Determination of slip resistance of pedestrian surfaces - Methods of evaluation"  
**Annex B** – Shod ramp test


The sample covering was delivered in a surface condition ready for testing.  
Test direction parallel to the grain

Test result: Angle value  $\alpha_{\text{shod}}$ : **9°**

Assessment: **slip resistance class:** **R9**

**SÄUREFLIESNER-VEREINIGUNG E. V.**  
Institut für Wand- und Bodenbeläge  
Managing Director

  
Dipl.-Ing. Friedrich Höltekemeyer

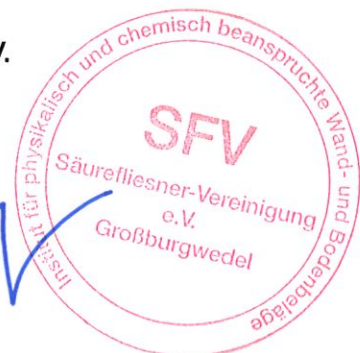

Großburgwedel, 01.02.2022  
Schu/ke

This test certificate is valid as long as there is no change in the above mentioned test-basis - for products which are identical to the test specimen. The certificate is given for 5 years (starting from test date). Publication and reproduction of this certificate is only allowed in unabridged form.



– Institut für Wand- und Bodenbeläge –  
**SÄUREFLIESNER-VEREINIGUNG E.V.**

Im Langen Felde 4, 30938 Burgwedel · Telefon (0 51 39) 99 82-0 · Telefax (0 51 39) 99 82-40 · E-Mail: info@saeurefliesner.de

